

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057318 A1

(51) International Patent Classification⁷: **G01N 23/222**

(21) International Application Number:
PCT/DK2003/000909

(22) International Filing Date:
19 December 2003 (19.12.2003)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA 2002 01961 20 December 2002 (20.12.2002) DK

(71) Applicant (for all designated States except US): **FORCE TECHNOLOGY** [DK/DK]; Park Allé 345, DK-2605 Brøndby (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PEDERSEN, Niels, Hald** [DK/DK]; Gadestævnet 52, DK-2650 Hvidovre (DK).

(74) Agent: **ZACCO DENMARK A/S**; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN APPARATUS AND A METHOD OF DETECTING HYDROGEN BY USE OF A NEUTRON SOURCE

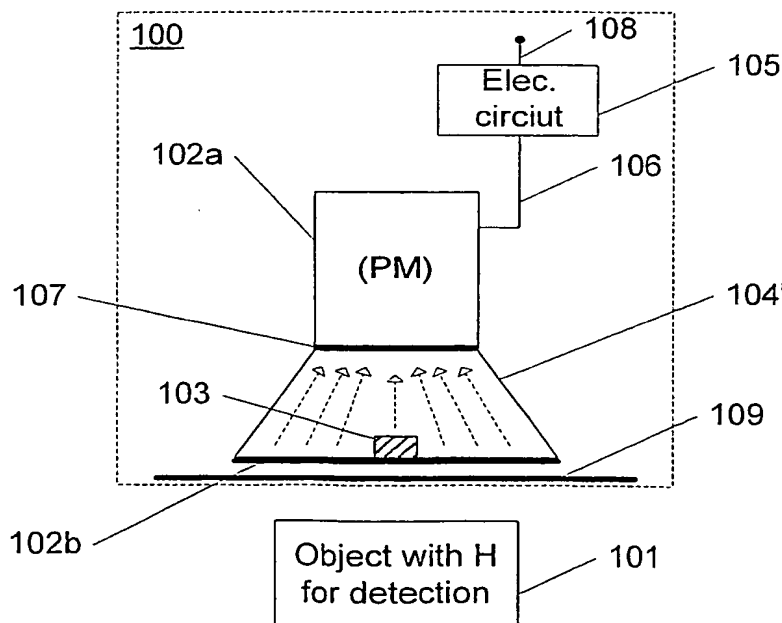

(57) Abstract: This invention relates to an apparatus for the detection of the hydrogen content of an object, wherein said apparatus comprises a neutron source that emits fast/energy-rich neutrons; a detector device for detecting thermal neutrons; a moderator that brakes and reflects neutrons upon collision; wherein said detector device comprises a light-emitting unit that emits light in case of a nuclear event/reaction with a thermal neutron; a light-registering unit that emits an electric pulse/an electric signal when a flash of light is detected; and wherein said moderator is a light-conductive unit arranged between said light-emitting unit and said light-registering unit. Moreover the invention relates to a corresponding method of detecting hydrogen. Hereby an apparatus and a method are provided for the detection of humidity/water/hydrogen with improved sensitivity which entails that the used neutron source need not be as powerful and that smaller amounts of hydrogen can be detected compared to

previously suggested solutions. Moreover, a reliable non-modifying/non-destructive detection is provided.

WO 2004/057318 A1

JC17 Rec'd PCT/PTO 17 JUN 2005

An apparatus and a method of detecting hydrogen by use of a neutron source

5 This invention relates to an apparatus for detecting the contents of hydrogen in an object.

This invention also relates to a method of detecting the contents of hydrogen in an object.

10 In general, the invention relates to a detection apparatus that is able to detect hydrogen (for instance for detecting an amount of water) in an object by use of a neutron source. A neutron source for this purpose presents the advantage ia that neutrons are able to penetrate certain barriers. For instance, it is possible by this invention to estimate the amount of hydrogen, 15 water and/or humidity in eg insulation material arranged in ia a steel pipe. It can be used for checking whether and how much water/humidity there is present in the insulation material, which is important to know eg in connection with the assessment of the risk of corrosion, rust, etc. This may be performed without having to remove or cut in parts of the pipe/object or to separate the 20 object/pipe or parts thereof.

A source of fast neutrons emits fast/energy-rich neutrons, ie neutrons with high kinetic energy. In the present invention the known discovery is used to advantage that atomic nuclei (and in particular hydrogen) brake neutrons 25 upon collision, a phenomenon typically referred to as 'elastic scattering/collision' (whereby the velocity is reduced and the direction is changed for a collided neutron). This invention uses a detector device that detects relatively slow/energy-poor neutrons, the so-called thermal neutrons. After a neutron has been braked sufficiently, it can be detected by the 30 detector device. The process of braking neutrons is typically designated 'moderation' and a physical arranged for this a 'moderator'. In order for a

neutron to be detected, most often it has to collide several times with hydrogen atoms.

In order to accomplish an increased sensitivity it is known to configure the detection apparatus to comprise an (auxiliary) moderator, an amount of hydrogen or a moderator material that brakes and reflects/scatters neutrons by elastic scattering/collision and is arranged such that a portion of incoming neutrons are reflected against the detector and the hydrogen for detection. In broad outline the further amount of hydrogen/moderator material serves as a (partial) neutron reflector that also brakes the neutrons, thereby causing a larger amount of braked/thermal neutrons to be detected. This is also often referred to as neutron back-scatter.

Patent specification GB A 1180450 discloses an arrangement for detecting humidity/hydrogen by use of a neutron source. The arrangement according to GB A 1180450 is shown schematically in Figure 1 and comprises a fast-neutron source (103), a detector for thermal neutrons (102) and a hydrogen-containing neutron-braking and -reflecting/-scattering material (ie moderator material) (104) for providing the back-scatter effect, wherein the detector (102) and the source (103) are arranged between this material (104) and the material/object (101) in which the humidity/water/hydrogen is to be detected.

It is mentioned in patent specification GB A 1180450 that the detector of thermal neutrons (102) may be a scintillator.

25

Albeit the detector according to GB A 1180450 has an increased sensitivity due to the moderator (104), it is possible to accomplish superior sensitivity as taught by the present invention.

30 Patent specification US 3,707,631 relates to a system for non-destructive analysis of nuclear fuel, wherein a neutron source and a detector device are

arranged to each their side of the sample. The source emits low-energy neutrons (< 1 Mev), ie not thermal, where a comparatively large moderator brakes the emitted neutrons to the effect that they can initiate a fission process that emits fast (> 1 Mev) neutrons that are detected in an energy-selective scintillator. In this system, measurement is performed on fast neutrons and various measures must be taken to separate them from the (almost equally) fast neutrons from the source that have not been braked. A light guide is also mentioned, the primary function of which is to couple a number of very different scintillator geometries to the front of a standard photo-multiplier.

The arrangement disclosed in US 3,707,631 is not directed against or suitable for the detection of hydrogen.

Patent specification No. US 5,446,288 teaches detection of hydrogen and other light elemental substances using detection of when thermal neutrons, where light source and detector are on the same side of the sample. A detector device comprises a scintillator coupled to a photo-multiplier via a light guide in the form of an air light guide, wherein the neutron source is enclosed by moderator material that is separated from the light guide.

It is an object of the invention to provide an apparatus for the detection of humidity/water/hydrogen and exhibiting improved sensitivity.

It is a further object of the invention to provide a detection apparatus, wherein the strength of the used neutron source need not be as powerful as in the prior art.

It is a further object of the invention to provide a detection apparatus with reliable, non-modifying/non-destructive detection.

It is also an object of the invention to provide a compact detection apparatus.

These objects are provided by an apparatus of the kind described above and comprising:

- 5
- a neutron source that emits fast/energy-rich neutrons;
 - a detector device for detecting thermal neutrons;
 - a moderator that brakes and reflects neutrons upon collision;

wherein

- 10
- said detector device comprises
 - a light-emitting unit that emits light in case of a nuclear event/reaction with a thermal neutron; and
 - a light-registering unit that emits an electric pulse/an electric signal when a flash of light is detected; and
 - said moderator is a light-conductive unit arranged between said light-emitting unit and said light-registering unit.
- 15

Hereby a hydrogen-detector/humidity probe is achieved that features improved sensitivity, the light-conductive unit providing a conductivity/concentration of the light from the light-emitting unit to the light-registering unit, thereby further improving the performance/sensitivity, as it is ensured that all nuclear events that bring about a flash of light will, with a much increased degree of reliability, be registered by the light-registering unit.

20

25 Moreover, the dual function of the light-conductive unit, as it also provides a moderating effect, ie contains hydrogen/moderator material for accomplishing the above-mentioned back-scatter effect, means that the apparatus according to the invention can be configured to be compact or at least not with dimensions that exceed the solutions that already comprise an auxiliary

30 moderator.

The increased sensitivity means that the used neutron source need not be so powerful as to constitute a health risk and thus presupposes safety equipment for an operator or cumbersome handling thereof, while simultaneously a reliable, non-modifying/non-destructing detection is still
5 provided, ie without modification of a measurement object (eg sampling, cutting off a part of a pipe/object, taking it apart, etc). Moreover, smaller amounts of hydrogen can be detected compared to previously known solutions, due to the increased sensitivity.

10 According to one embodiment, said light-emitting unit is a scintillator and said light-registering unit is a photo-multiplier (PM)).

Alternatively the light-registering unit is a photo-diode.

15 According to one embodiment, said source is comprised of or embedded in said moderator. Hereby a compact detector is provided.

According to a preferred embodiment said light source is arranged essentially in proximity of or in/around the centre of the face of said moderator that
20 adjoins the light-emitting unit.

This position has proved to be convenient in order to accomplished further enhanced sensitivity, as a larger amount of neutrons will be reflected and moderated and hence detected.

25

According to one embodiment said light-conductive unit is configured essentially with a face that adjoins said light-emitting unit and having a relatively smaller face adjoining a detection face of said light-registering unit.

30 Hereby a comparatively larger face of the light-emitting unit can be coupled optically to a smaller detection face of the light recording unit, which yields an

advantage with regard to economics, the cost of such light-registering units being relatively high and depending to a large extent on the recording area.

For instance, said light-conductive unit may be configured essentially as a
5 cone, where the top is cut away (ie a trapezoidal shape in 2D/in case of a section in the centre line of the cone as indicated eg in figure 2a).

In one embodiment, said light-conductive unit is configured for emitting light conducted from said light-emitting unit to the light-registering unit essentially
10 perpendicular to a detection face of the apparatus.

Hereby a detection apparatus is readily provided that has a larger expanse essentially perpendicular to a detection face of the object in which hydrogen is to be detected. This gives an advantageous embodiment, in particular if
15 the detection apparatus according to the invention is intended for being operated primarily in a depth/in a longitudinal direction.

According to an alternative embodiment said light-conductive unit is configured for emitting light conducted from said light-emitting unit to the
20 light-registering unit essentially in parallel with a detection face of the apparatus.

In this manner a detection apparatus is readily provided that has a larger expanse, essentially in parallel with a detection face of the object in which
25 hydrogen is to be detected. In popular terms the detection apparatus is longer than it is wide. Hereby an advantageous configuration is provided, in particular if the detection apparatus according to the invention is intended for being handheld and operated manually.

30 According to one embodiment the apparatus further comprises an electric circuit connected to said detector device, wherein said circuit is configured for

generating a signal that represents an estimated amount of hydrogen, water and/or humidity content on the basis of the electric signal from said light-registering unit.

5 Moreover the invention relates to a method of detecting hydrogen content of an object comprising the steps of:

- emitting fast/energy-rich neutrons from a neutron source;
- detecting thermal neutrons by means of a detector device;
- 10 • braking and reflecting neutrons by collision of a moderator,

wherein the method further comprises:

- emitting light by a light-emitting unit by a nuclear event/reaction with a thermal neutron;
 - 15 • emitting an electric pulse/an electric signal by a light-registering unit upon recording of a flash of light; and
 - conducting light from said light-emitting unit to said light-registering unit by a light-conductive unit arranged between said light-emitting unit and said light-registering unit; of which said moderator is the light-conductive unit.
- 20

According to one embodiment said light-emitting unit is a scintillator and said light-registering unit is a photo-multiplier (PM) or a photo-diode.

25

According to one embodiment said source is comprised of or embedded in said moderator. Hereby compact detection is provided.

According to one embodiment said source is arranged essentially in proximity
30 of or about/in the centre of the face of said moderator that adjoins the light-emitting unit.

According to one embodiment, said light-conductive unit is configured essentially with a face adjoining said light-emitting unit and having a relatively smaller face adjoining a detection face of said light-registering unit.

5

According to one embodiment said light-conductive unit is configured for emitting light conducted from said light-emitting unit to the light registering unit essentially perpendicular to a detection face.

- 10 According to one embodiment said light-conductive unit is configured for emitting light conducted from said light-emitting unit to the light-registering unit essentially in parallel with a detection face.

- 15 According to one embodiment the method further comprises generation within an electric circuit connected to said detector unit a signal representing an estimated amount of hydrogen, water and/or humidity content, wherein said generation is performed on the basis of the electric signal from said light-registering unit.

- 20 The method according to the invention and embodiments thereof correspond to the apparatus according to the invention and embodiments thereof and have the same effects for the same reasons.

- 25 In the following the invention will be explained in further detail with reference to the drawing, wherein

Figure 1 illustrates prior art that uses the back-scatter principle for detecting hydrogen/water;

- 30 Figure 2a schematically illustrates an embodiment of an apparatus according to the invention;

Figure 2b schematically illustrates an embodiment of an apparatus according to the invention;

- 5 Figure 2c schematically illustrates an alternative embodiment of an apparatus according to the invention.

Figure 1 illustrates the prior art that uses the back-scatter principle for detecting hydrogen/water. Shown is a detection apparatus (100) for detecting
10 hydrogen in an object (101). The detection apparatus (100) comprises a moderator containing hydrogen (104), a fast-neutron source (103), and a detector for thermal neutrons (102), wherein the neutron source (103) and the detector for thermal neutrons (102) are arranged between the moderator (104) and the object (101) by use of a detection apparatus (100). Moreover a
15 detection face (109) for the detection apparatus (100) is shown schematically, ie the face to be arranged adjoining the object (101) in which hydrogen is to be detected. Neutrons emitted by the source (103) will have largely all directions, and some of these neutrons will collide with the hydrogen both in the moderator (104) and with the hydrogen that is to be
20 estimated in the object (101), whereby the neutrons will change direction and loose speed. A portion of the neutrons will be reflected against the detector by thermal neutrons 102, and when they have collided sufficiently many times they will be thermal (ie they will typically have a kinetic energy within the range of about approximately 0,025 eV), whereby the detector will record
25 them, and the amount of hydrogen in the object (101) can be detected. Some neutrons will be reflected both by the moderator (104) and the hydrogen in the object (101), while others will continue in other directions and/or be absorbed. Typically a neutron shall collide in average six times with a hydrogen atom in order to have an energy that the detector is able to detect
30 (the neutron needs to reduce its energy level by approximately 6 to 8 orders of magnitude). The moderator (104) provides the effect that more neutrons

with a suitable energy will be detected compared to a scenario in which it was only the hydrogen in the test object (101) that was primarily present for reducing the kinetic energy of the neutrons. Hereby the sensitivity of the detection apparatus (100) is enhanced.

5

Figure 2a schematically illustrates an embodiment of an apparatus according to the invention. Shown in the figure is a detection apparatus (100) that comprises a neutron source (103) and neutron-braking and -reflecting material (104'), ie moderator material, eg comprising hydrogen. The detection
10 apparatus (100) has a detection face (109) that is intended for being directed towards or against an object (101) in which hydrogen is to be detected.

Moreover the detection apparatus (100) comprises a detector of thermal neutrons (102a, 102b) that comprises, in accordance with the invention, a
15 light-emitting unit (102b) and a light-registering unit (102a), wherein the light registering unit (102a) is connected to an electric circuit (105). The light-emitting unit (102b) emits light by a nuclear event /reaction with a thermal neutron, while the light-registering unit (102a) emits an electric pulse/an electric signal (106) upon registration of a flash of light, where the emitted
20 electric pulse/the emitted electric signal is received in the electric circuit (105) for subsequent interpretation, processing, etc.

According to the invention the moderator material is a light-conductive unit or a light-conductive material (104'). In this manner the light-conductive unit
25 (104) comprises both a moderating effect, ie contains hydrogen/moderator material for obtaining the above-referenced back-scatter effect, and conducting/concentrating light from the light-emitting unit (102b) to the detection face (107) of the light-registering unit (102a), thereby further enhancing the performance/sensitivity, it being ensured that all nuclear
30 events that bring about a flash of light will, with a much higher degree of certainty, be recorded by the light-registering unit (102a), thereby enabling

that smaller amounts of hydrogen can be detected without an ensuing need to increase the strength of the neutron source.

5 The movement of the light from the light-emitting unit (102b) to the light-registering unit (102a) is shown schematically by dotted arrows in the figure.

Moreover the dual function of the light-conductive unit/moderator (104') means that the detection apparatus (100) can be configured compact or at least not larger than solutions that already comprise an auxiliary moderator
10 for achieving neutron back-scatter.

In the shown embodiment the light-conductive unit (104') is configured essentially with a face adjoining said light-emitting unit (102b) and having a relatively smaller face adjoining a detection face (107) of the light-registering
15 unit (102a).

Hereby a relatively larger face of the light-emitting unit (102b) can be coupled optically to a smaller detection face (107) of the light-registering unit (102a), which yields an advantage from a financial point of view, as the price of such
20 light-registering units (102a) is comparatively high and to a large degree depend on the registration area.

For instance, the light-conductive unit can be configured essentially as a cone, where the top is cut away (ie a trapezoidal form in 2D/in case of a
25 section in the centre line of the cone, eg as shown in the drawing).

The light-conductive unit/the light-conductive material (104') may eg be a light-guide (English term) comprising hydrogen and/or other moderator material. According to a preferred embodiment the light-guiding unit/the light
30 conductive material (104') comprises Plexiglas.

Preferably the neutron source is comprised of/embedded in said moderator (104') and arranged essentially around or in the centre of the face of said moderator (104') that adjoins the light-emitting unit (102b).

- 5 This arrangement has proven to be convenient in order to obtain enhanced sensitivity as a larger number of neutrons will be reflected and moderated and hence detected.

10 According to one embodiment the light-emitting unit (102a) is a scintillator, which is a known standard unit that records a nuclear event and emits a flash of light when eg a thermal neutron hits the scintillator (102b). In practice photons are released. One example of a scintillator (102b) includes glass enriched with the lithium isotope Li-6.

- 15 According to one embodiment the light-emitting unit (102b) is a photo-multiplier, which is also a known standard unit that records even very weak flashes of light/photons and generates an electric pulse on the background of one or more of such. Alternatively the light-registering unit (102a) is a photo-

20

The electric circuit (105) receives electric pulses/signals from the light-registering unit/photo-multiplier (102a) and is thus able to record and/or process these signals depending on the relevant use, eg for estimating the amount of water/humidity/hydrogen in the object (101) or for other applications. For instance, one or more electric output signals (108) from the electric circuit (105) can be used eg for a display/meter (not shown) that shows the estimated amount and/or other functions.

25

- Moreover the detection apparatus (100) may comprise other types (optionally non-hydrogen-containing materials) of light-conductive material (104') as long as they have a neutron-moderating effect.
- 30

Preferably the light-registering unit/photo-multiplier (102a) and the light guide (104) will collide/adjoin each other at the detection face (107) of the light-registering unit/the photo-multiplier with an optical adaptor material there
5 between, such as eg silicon grease, transparent silicon, joint filler, etc. to ensure as low an optic loss as possible by the transition.

The neutron source (103) may be eg an isotope-based neutron source.

10 Alternatively the neutron source (103) can also be arranged elsewhere than within/around the centre of the light guide (104').

The electric circuit (105) may have many functions and configurations depending on the current use of the invention. A simple electric circuit merely
15 has to record the number of electric pulses from the photo-multiplier/the light-registering unit (102a) for a period of time in order to be able to estimate the amount of water/hydrogen in a simple manner. Alternatively more sophisticated electric circuits can be used.

20 Moreover the apparatus (100) may comprise a material disc, plate, piece, etc (not shown) arranged such that the neutron source (103) is between that and the detection face (109). Said disc, plate, piece, etc, must be of a material that possesses the property that it is good at reflecting neutrons without considerable loss of energy, eg iron or molybdenum. Moreover the apparatus
25 (100) may comprise a ring, pipe, cylinder, etc, arranged such that it encircles the neutron source (103), whereby gamma radiation, if any, is removed that may otherwise give false hits upon reaction with the light-emitting unit (102b). This ring, pipe, cylinder, etc, has to be of a material that possesses the property that, to a particular extent, it absorbs gamma radiation, eg lead or
30 wolfram.

Figure 2b schematically illustrates an alternative embodiment of an apparatus according to the invention. Shown in the figure is a detection apparatus (100) according to the invention comprising the same elements/units as shown in and explained in connection with figure 2a, but wherein they are arranged and optionally configured differently. More specifically the combined moderator and light-conductive unit (104'') is configured such that it essentially conducts the light in parallel with the detection face (109) of the detection apparatus (100) to the light-registering unit (102a) (conversely to the embodiment shown in Figure 2a, where the light is conducted essentially perpendicular to the detection face (109), thereby enabling a rather elongate configuration of the detection apparatus (100). The light-conductive unit (104'') may be configured eg as shown in the figure, with a 2D profile as a triangle, wherein the incoming light from the light-emitting unit (102b) is reflected essentially perpendicular in relation to the incoming direction, ie essentially in parallel with the detection face (109).

Alternatively the light-conductive unit (104'') may be a batch of optical fibres/optical fibre cable that angles/turns/deflects the light sideways in relation to the primary angle of incidence, ie essentially in parallel with the detection face (109).

The movement of the light from the light-emitting unit (102b) to the light-registering unit (102a) is shown schematically by dotted arrows in the figure.

In the shown embodiment, the light-conductive unit (104'') is configured essentially with a face adjoining said light-emitting unit (102b) and having a relatively smaller face adjoining a detection face (107) of the light-registering unit (102a).

The elongate configuration is particularly useful if the detection apparatus (100) is to have a configuration that is suitable for handheld/manual operation with ensuing easier handling/operation.

- 5 Figure 2c schematically illustrates an alternative embodiment of an apparatus according to the invention. The shown embodiment corresponds to the one shown in figure 2a, but wherein the location of the neutron source (103) is changed. In the shown embodiment the neutron source (103) is arranged more towards the centre of the moderator (104'), ie not in the face of the
10 moderator (104'') that adjoins the light-emitting unit (102b). Alternatively, the neutron source (103) can be arranged eg more towards the sides of the moderator (104'). The same modification of the position of the neutron source can also be performed in the embodiment shown in figure 2b or others.

Claims

1. An apparatus for detecting the hydrogen content of an object (101), wherein the apparatus (100) comprises
- 5
- a neutron source (103) that emits fast/energy-rich neutrons;
 - a detector device (102; 102a; 102b) for detecting thermal neutrons;
 - a moderator (104; 104'; 104'') that brakes and reflects neutrons upon collision;
- characterised in that
- 10
- said detector device comprises
 - a light-emitting unit (102b) that emits light in case of a nuclear event/reaction with a thermal neutron; and
 - a light-registering unit (102a) that emits an electric pulse/an electric signal (106) when a flash of light is detected;
- 15
- and that said moderator (104', 104'') is a light-conductive unit arranged between said light-emitting unit (102) and said light-registering unit (102a).
2. An apparatus according to claim 1, **characterised in** that said light-emitting unit (102b) is a scintillator and that said light-registering unit (102a) is a photo-multiplier (PM) or a photo-diode.
- 20
3. An apparatus according to claims 1-2, **characterised in** that said source (103) is comprised of or embedded in said moderator (104').
- 25
4. An apparatus according to claims 1-3, **characterised in** that said source (103) is arranged essentially in proximity of or about/in the centre of the face of said moderator (104', 104'') that adjoins the light-emitting unit (102b).
- 30

5. An apparatus according to claims 1-4, **characterised in** that said light-conductive unit (104') is configured essentially with a face that adjoins said light-emitting unit (102b) and having a relatively smaller face adjoining a detection face (107) of said light-registering unit (102a).
- 5
6. An apparatus according to claims 1-5, **characterised in** that said light-conductive unit (104'') is configured for emitting light conducted from said light-emitting unit (102b) to the light-registering unit (102a) essentially perpendicular to a detection face (109) of the apparatus (100).
- 10
7. An apparatus according to claims 1-5, **characterised in** that said light-conductive unit (104'') is configured for emitting light conducted from said light-emitting unit (102b) to the light-registering unit (102a) essentially in parallel with a detection face (109) of the apparatus (100).
- 15
8. An apparatus according to claims 1-7, **characterised in** that the apparatus further comprises an electric circuit (105) connected to said detector device (102; 102a), wherein said circuit (105) is configured for generating a signal (108) that represents an estimated amount of hydrogen, water and/or humidity content on the basis of the electric signal (106) from said light-registering unit (102a).
- 20
9. A method of detecting the hydrogen content (101) of an object comprising the steps of:
- 25
- emitting fast/energy-rich neutrons from a neutron source (103);
 - detecting thermal neutrons by means of a detector device (102; 102a; 102b);
- 30

- braking and reflecting neutrons by collision of a moderator (104; 104'; 104''),

characterised in that the method further comprises:

- emitting light by a light-emitting unit (102b) in the event of a nuclear event/reaction with a thermal neutron;
- emitting an electric pulse/an electric signal (106) by a light-registering unit (102a) upon recording of a flash of light; and
- conducting light from said light-emitting unit (102b) to said light-registering unit (102a) by a light-conductive unit arranged between said light-emitting unit (102b) and said light-registering unit (102a); of which said moderator (104'; 104'') is the light-conductive unit.

10. A method according to claim 9, **characterised in** that said light-emitting unit (102b) is a scintillator and that said light-registering unit (102a) is a photo-multiplier (PM) or a photo-diode.

11. A method according to claims 9-10, **characterised in** that said source (103) is comprised of or embedded in said moderator (104').

12. A method according to claims 9-11, **characterised in** that said source (103) is arranged essentially in proximity of or around/in the centre of the face of the moderator (104', 104'') that adjoins the light-emitting unit (102b).

13. A method according to claims 9-12, **characterised in** that said light-conductive unit (104') is configured essentially with a face that adjoins said light-emitting unit (102b) and having a relatively smaller face adjoining a detection face (107) of said light-registering unit (102a).

14. A method according to claims 9-13, **characterised in** that said light-conductive unit (104'') is configured for emitting light conducted from said light-emitting unit (102b) to the light-registering unit (102a) essentially perpendicular to a detection face (109).

5

15. A method according to claims 9-13, **characterised in** that said light-conductive unit (104'') is configured for emitting light conducted from said light-emitting unit (102b) to the light-registering unit (102a) essentially in parallel with a detection face (109).

10

16. A method according to claims 9-15, **characterised in** that the method further comprises generation, in an electric circuit (105) connected to said detector device (102; 102a), of a signal (108) representing an estimated amount of hydrogen, water and/or humidity content, wherein said generation is performed on the basis of the electric signal (106) from said light-registering unit (102a).

15

10/539709

1/2

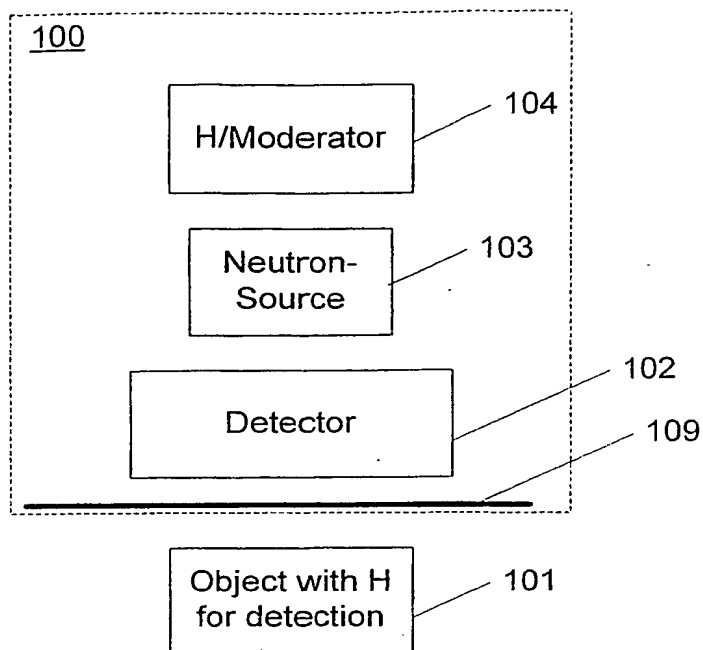
Prior
Art

Figure 1

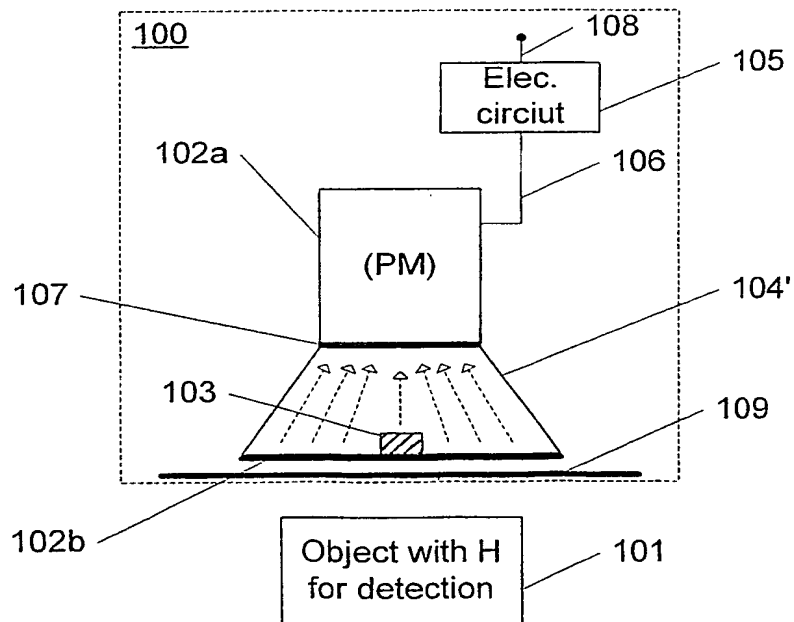


Figure 2a

10/539709

2/2

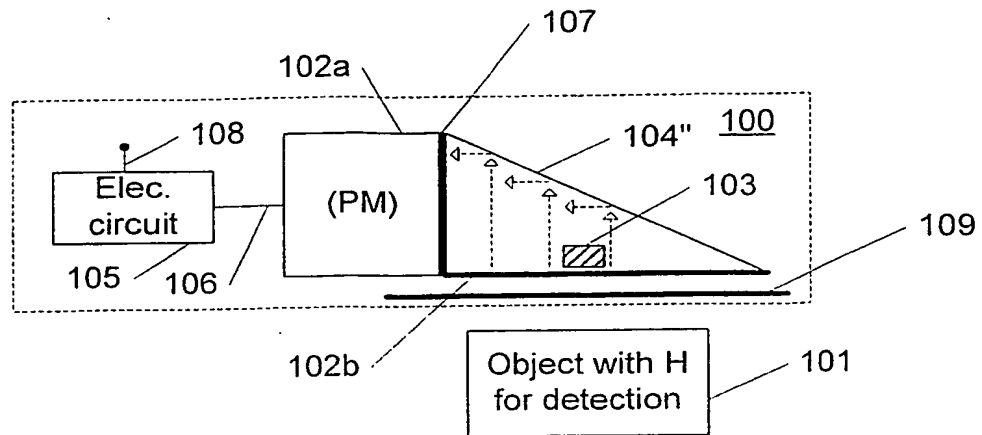


Figure 2b

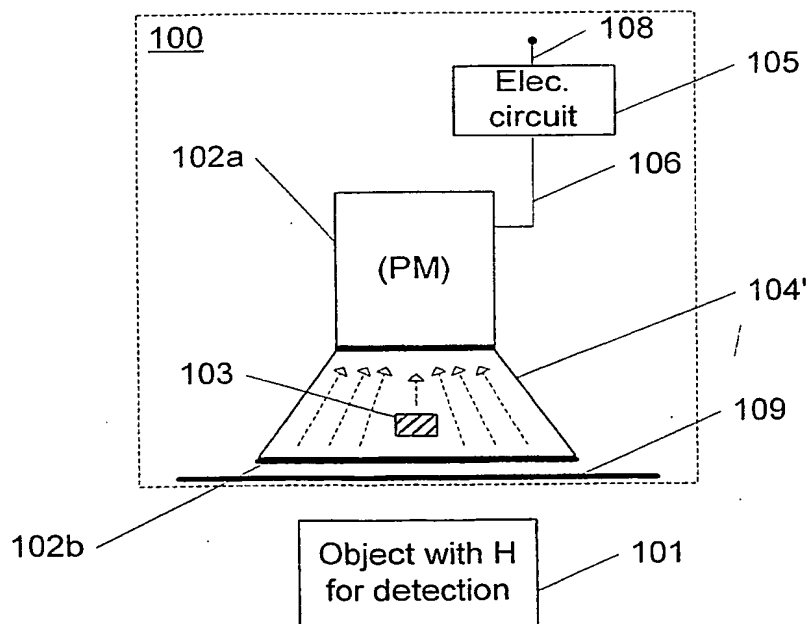


Figure 2c

INTERNATIONAL SEARCH REPORT

International Application No
PCT/DK 03/00909

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N23/222

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01N G01T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 05, 31 May 1999 (1999-05-31) & JP 11 051799 A (CHISAKA HARUO), 26 February 1999 (1999-02-26) abstract ---	1-16
Y	GB 984 566 A (PLESSEY CO LTD) 24 February 1965 (1965-02-24) page 2, line 68 - line 78 ---	1-16
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 006 (P-326), 11 January 1985 (1985-01-11) & JP 59 154347 A (SOIRU ANDO ROTSUKU ENGINEERING KK), 3 September 1984 (1984-09-03) abstract --- -/-	1-16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

15 April 2004

Date of mailing of the international search report

22.04.04

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

STURE ELNÄS/MN

INTERNATIONAL SEARCH REPORT

Inter()al Application No
PCT/DK 03/00909

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5-446 288 A (TUMER TUMAY O) 29 August 1995 (1995-08-29) column 3, line 35 - line 41 cited in the application abstract ---	1-16
A	GB 1 180 450 A (RHEINISCHE KALKSTEINWERKE G.M.B.H) 4 February 1970 (1970-02-04) cited in the application page 1, line 31 - line 49 ---	1-16
A	US 3 707 631 A (UNTERMYER SAMUEL) 26 December 1972 (1972-12-26) cited in the application column 2, line 24 - line 28 ---	1-16
A	GB 1 058 775 A (MTA KOZPONTI FIZ KI) 15 February 1967 (1967-02-15) page 1, line 30 - line 43 -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 03/00909

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11051799	A	26-02-1999	NONE	
GB 984566	A	24-02-1965	NONE	
JP 59154347	A	03-09-1984	NONE	
US 5446288	A	29-08-1995	US 5557108 A	17-09-1996
GB 1180450	A	04-02-1970	NONE	
US 3707631	A	26-12-1972	NONE	
GB 1058775	A	15-02-1967	NONE	